


CPCD 50/60/70 /80/90/100

QC51K2/CU10K2/YCK2/QC1K2



让世界更合力
EMPOWER THE WORLD

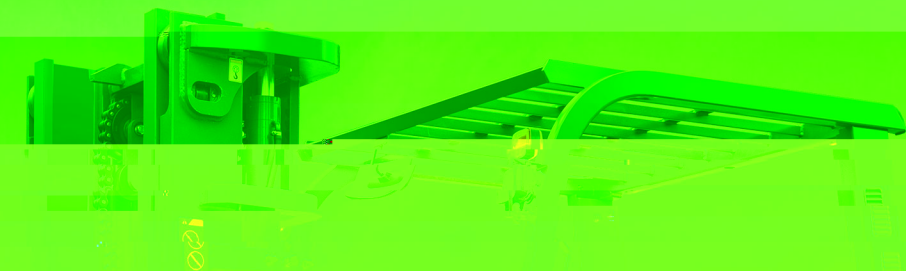

中国驰名商标

安徽合力股份有限公司
ANHUI HELI CO., LTD.

地址 / 中国 合肥 万兴大道668号
Address / No. 668, FangXing Road, Hefei, China
邮编 / Post Code / 230001


客服热线 / Customer Service Unit / 4001-800761
服务电话 / Service Phone / 400-551-6368/0063648005

* 本公司保留条款, 恕不另行通知, 恕不另行通知




5-1

叉车系列

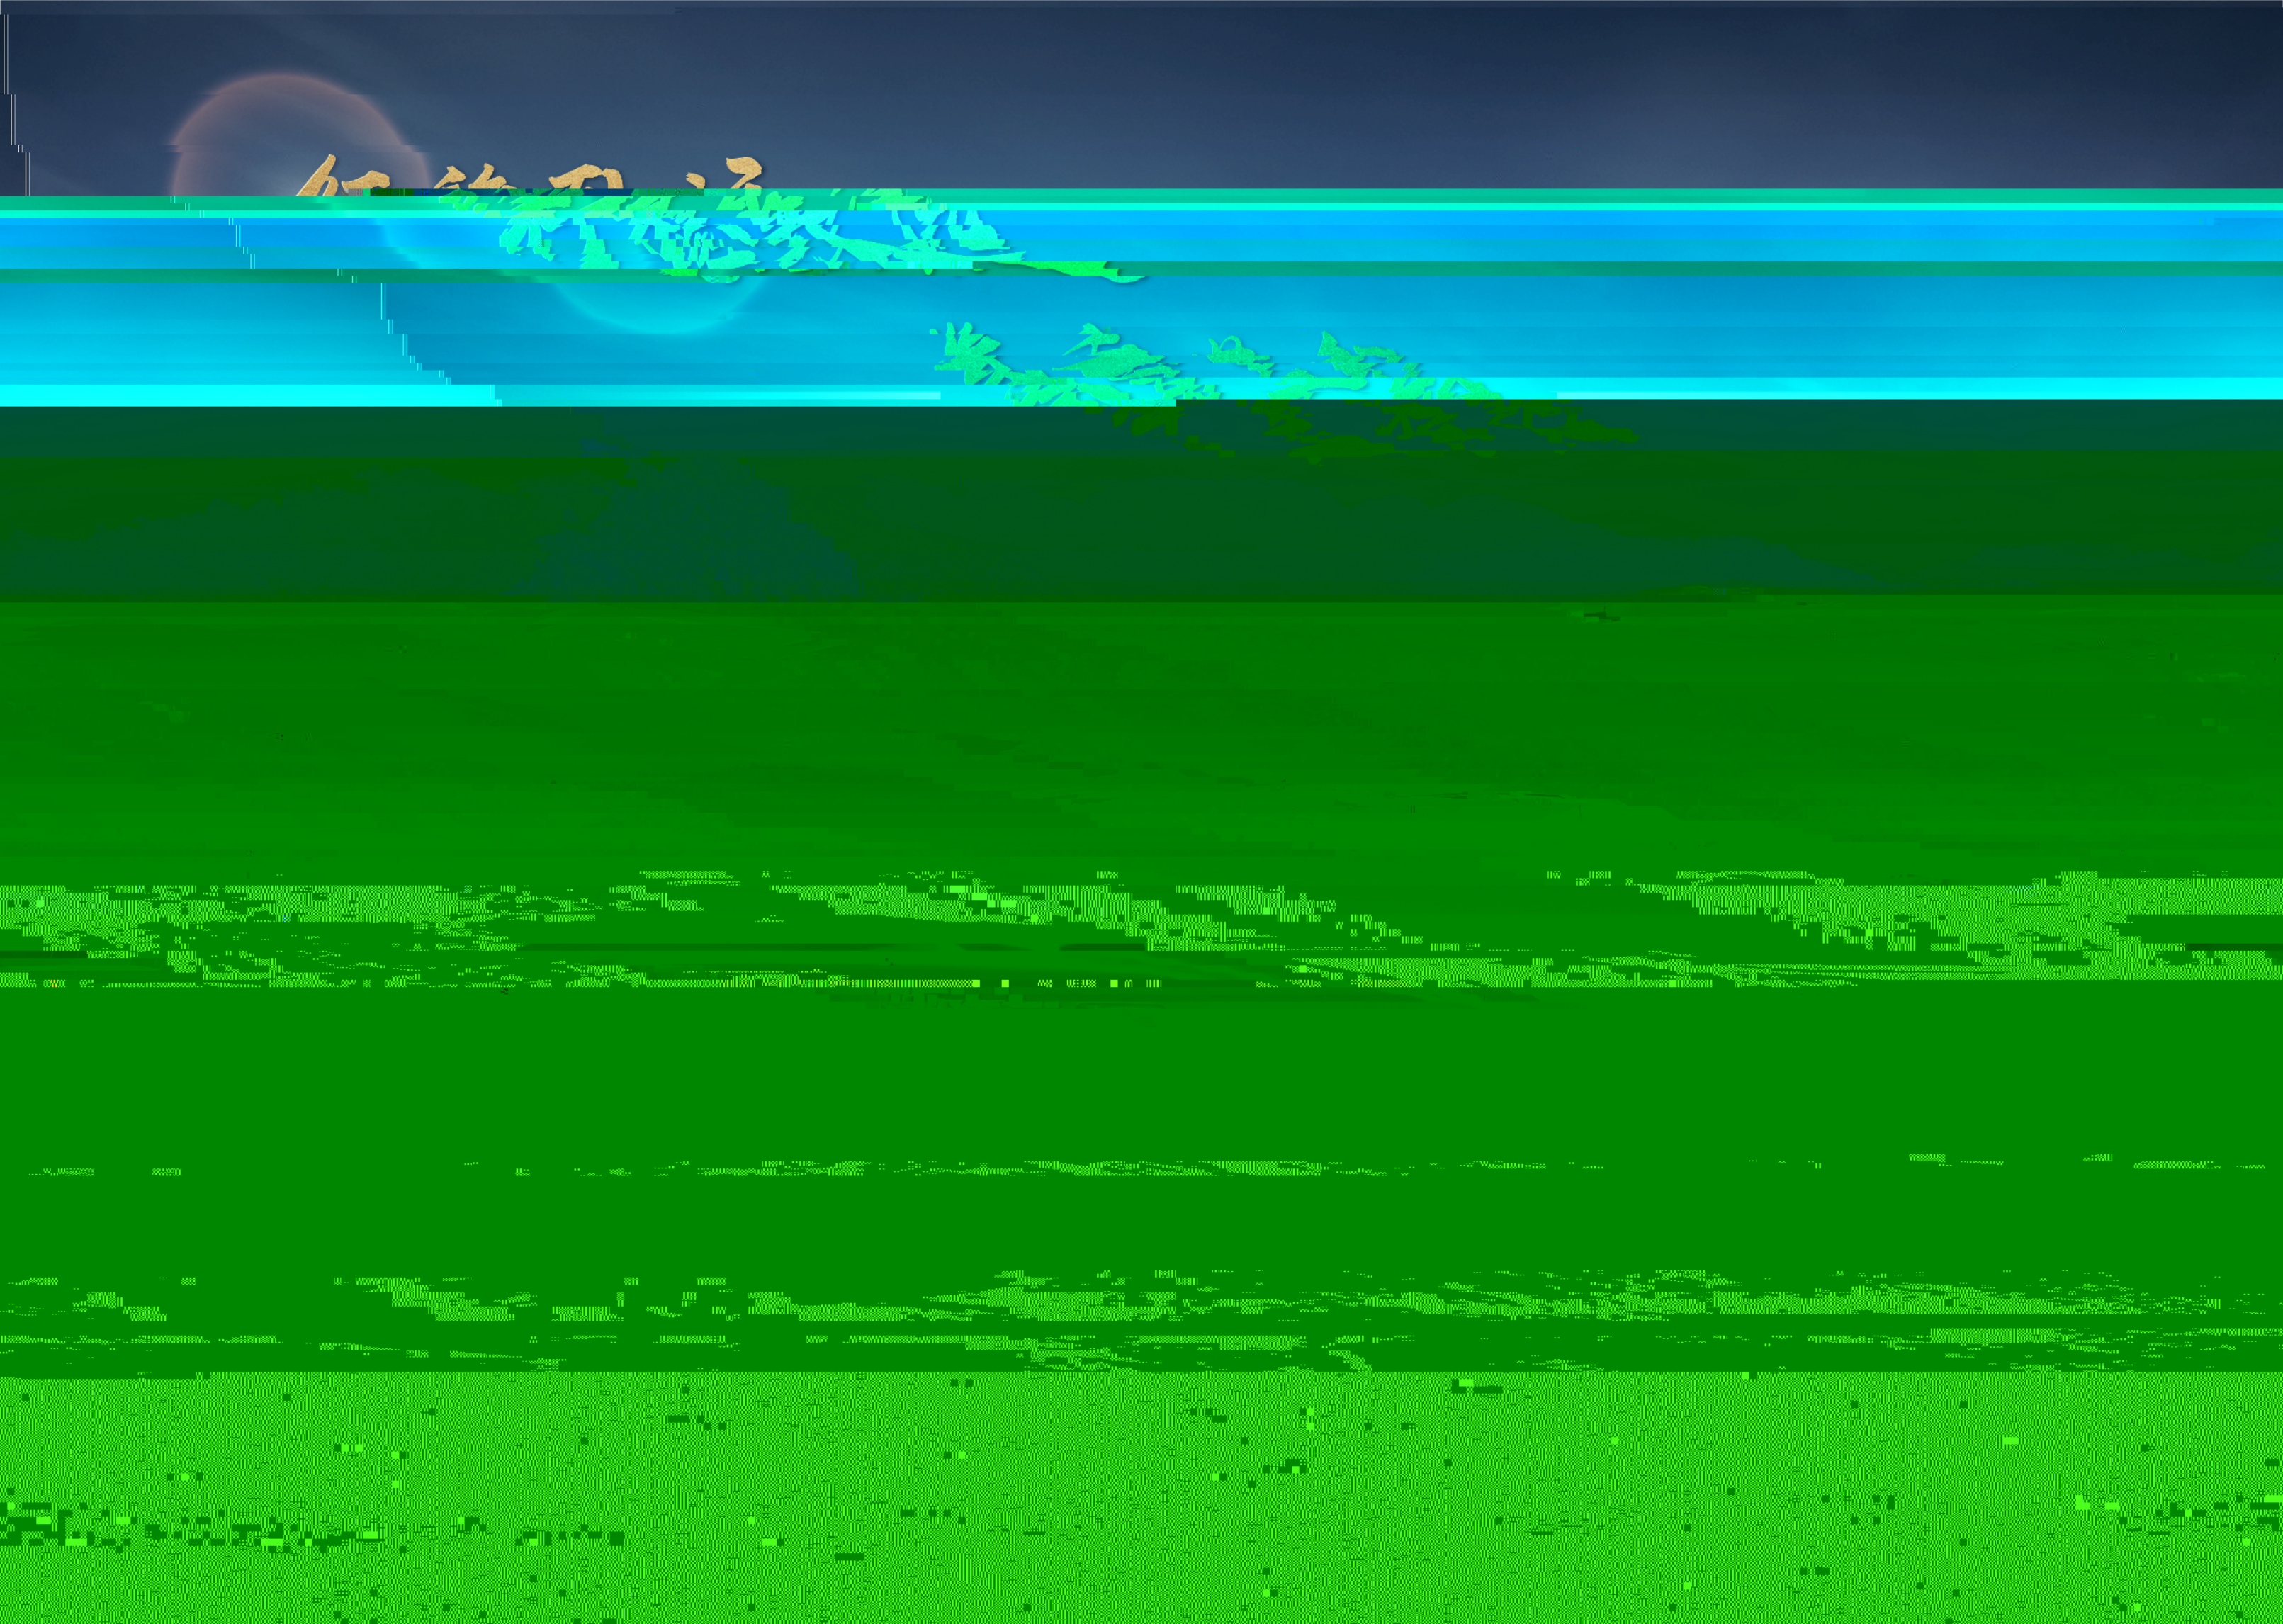


节能环保

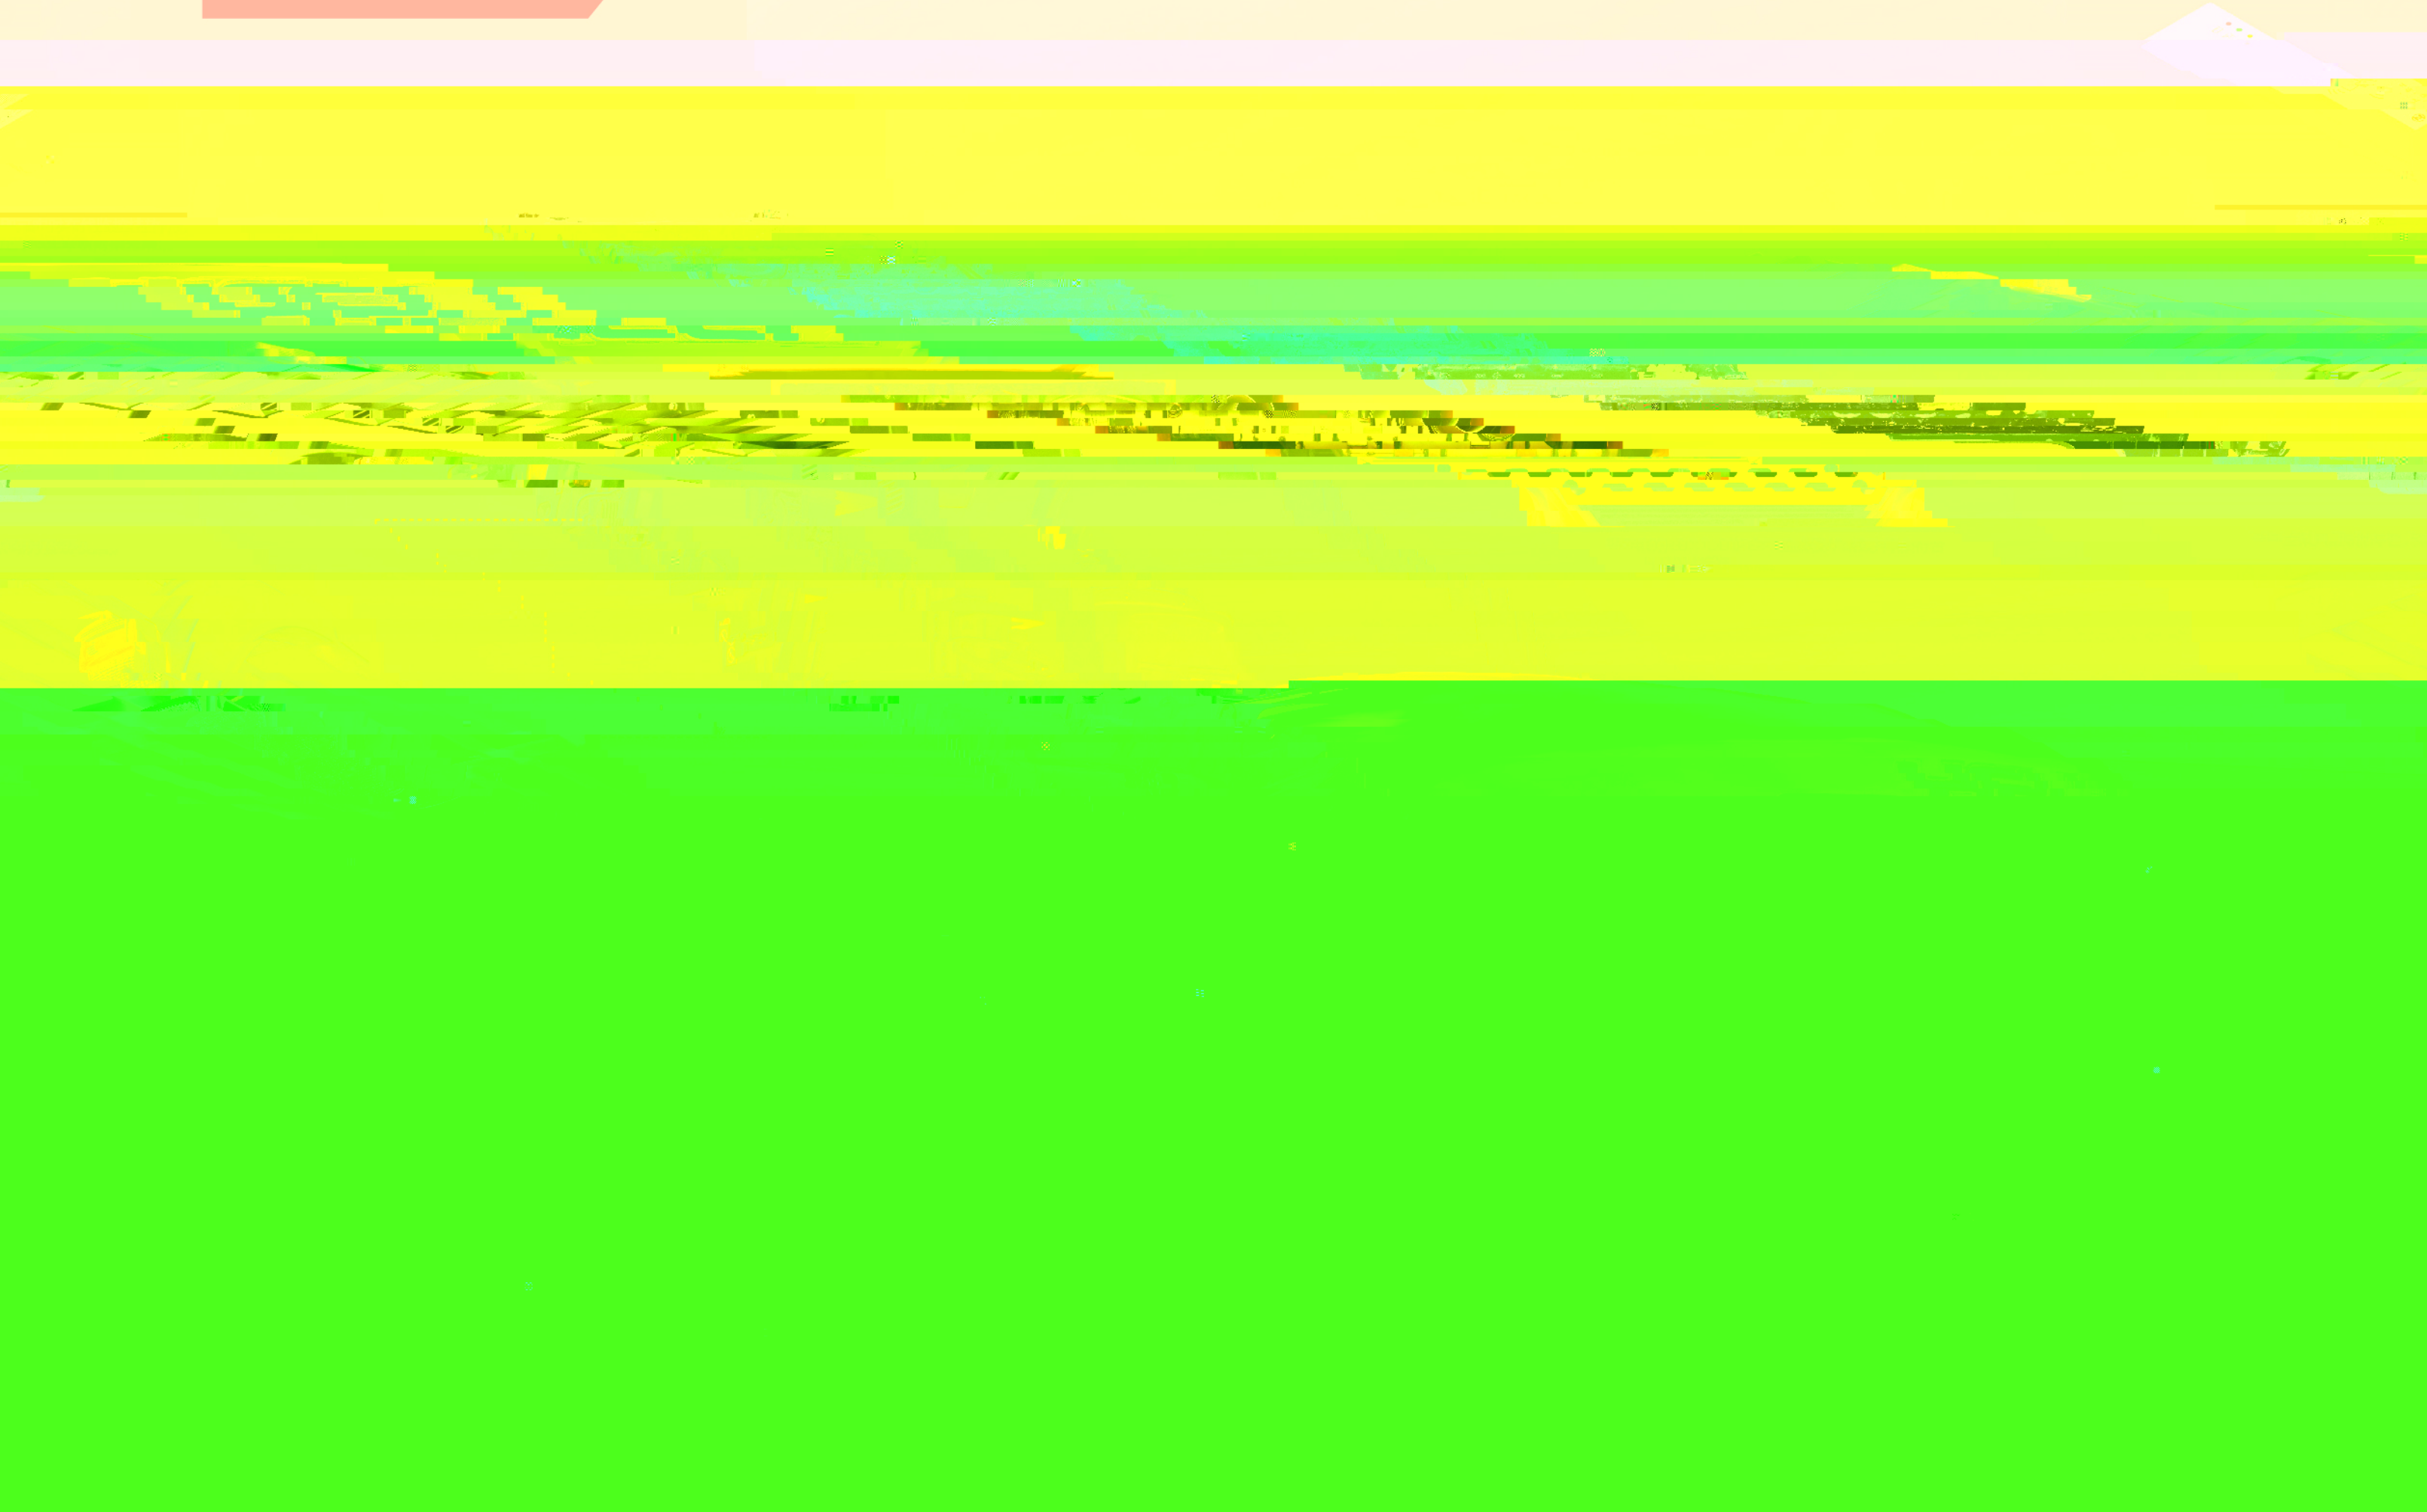


安全公告

安全公告

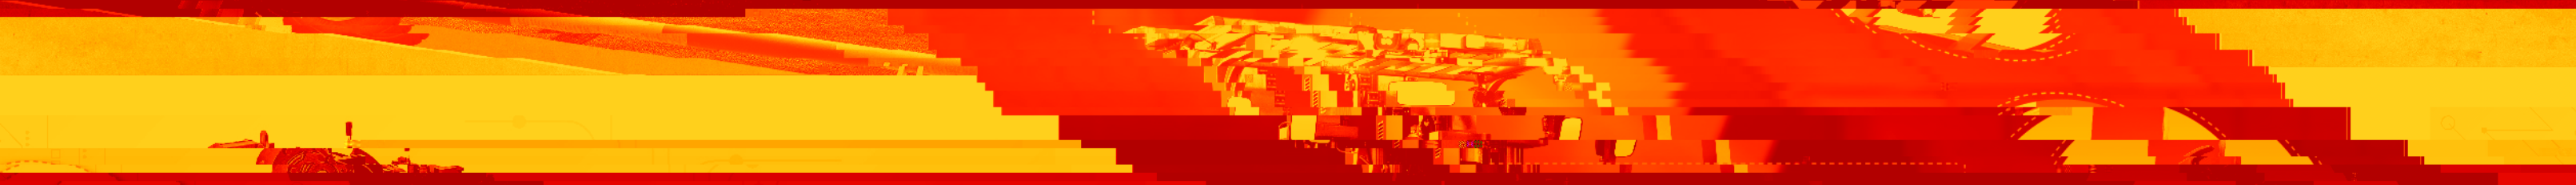

安全公告
安全公告

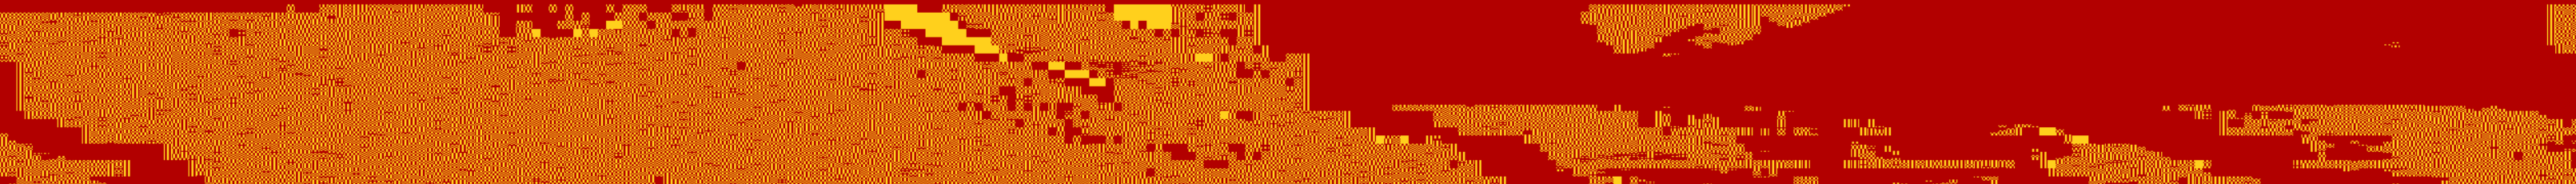

值得信赖
值得信赖

可靠的手动仪表

1. 400 2. 400 3. 400 4. 400

1. 400

1. 400 2. 400

1. 400 2. 400

1. 400 2. 400

1. 400 2. 400

4. 性能指标


双开式驾驶室侧门
选配



制造商技术参数



1.0 制造商

HELI




*ASC 直角堆垛通道宽度
a: 间隙

4.02 额定载荷	mm	3000	3000	3000	3000	3000	3000	3000	3000
4.03 动力方式									
4.04 驾桥方式									
4.05 前悬距	mm	535	590	585	605	685	685	700	

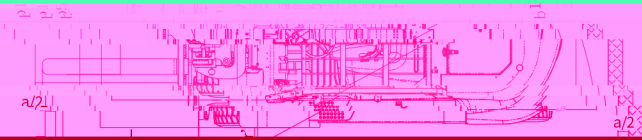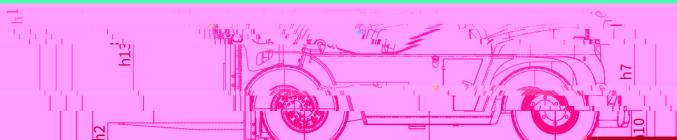

5.11 全长(带门架)	mm	4110	4850	4890	5020	5180	5440	
5.12 全长(不带门架)	mm	3550	3630	3670	3800	3960	4220	
5.13 全宽	mm		1600		1620		1650	

可选配的叉车发动机型号及主要技术参数

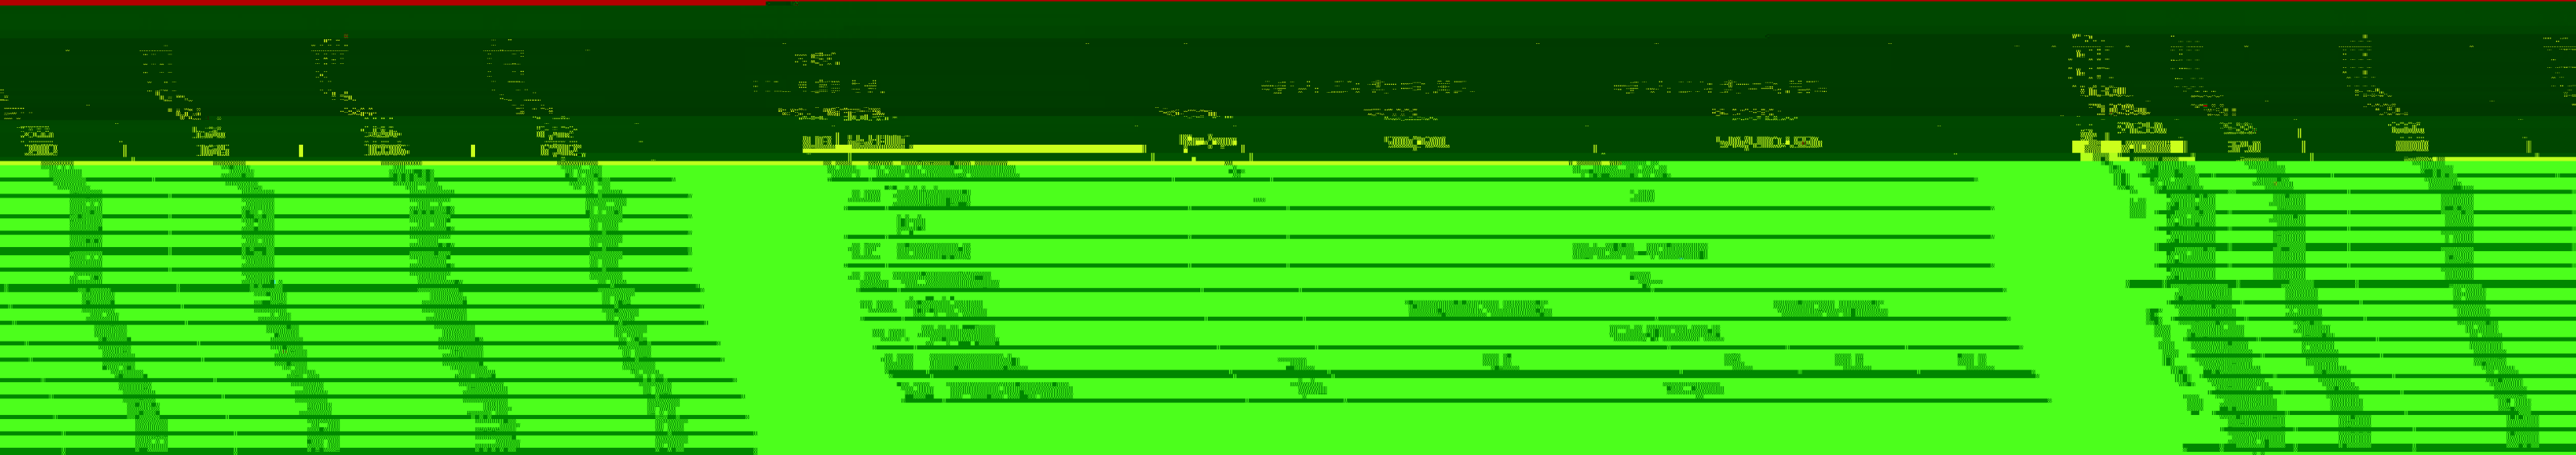

5t/6t/7t 门架参数表

门架类型	门架型号	最大起升高度 (mm)	承载能力 (吨)	门架高度 (mm)	自由起升高度 (mm)	额定起重量 (kg)	门架重量 (kg)	门架长度 (mm)
5t	5000	5000	5.0	5000	5000	5000	5000	5000
6t	6000	6000	6.0	6000	6000	6000	6000	6000
7t	7000	7000	7.0	7000	7000	7000	7000	7000

选项表

选项名称	选项描述
选项1	选项1描述
选项2	选项2描述
选项3	选项3描述

选项表 (续表)

选项名称	选项描述
选项4	选项4描述
选项5	选项5描述
选项6	选项6描述