

Contents

..... **1**

..... **6**

..... **8**

..... **14**

..... **18**

..... **20**

..... **23**


INMa

INMa 6 WMI 5 I S

⚠ 6 : "

⚠ : 6 16

⚠ 17 6

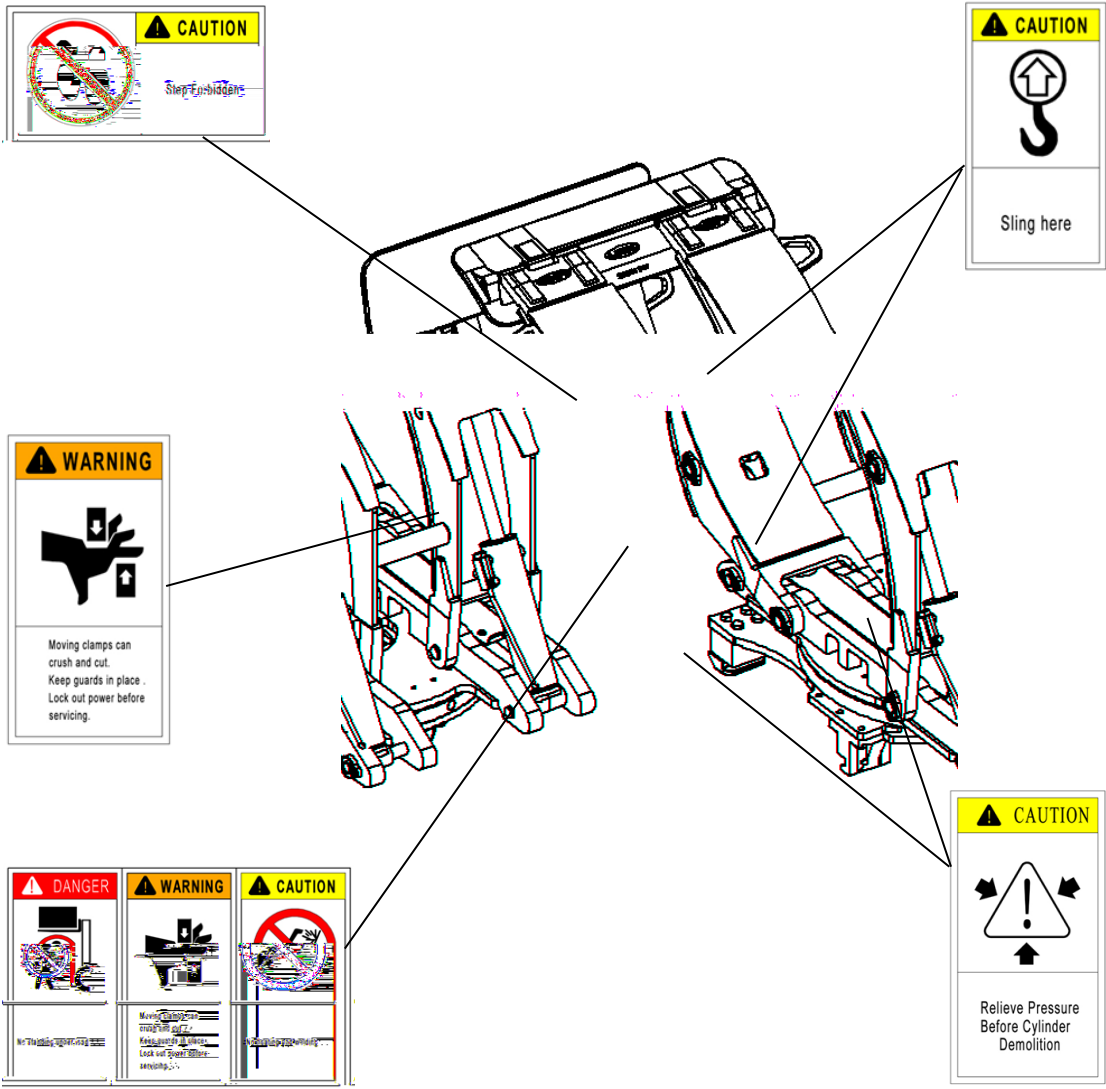

7 Roll Clamp With WM

■ 8

■

■

■

1

■ 8

!

7 Roll Clamp With IM 6 WM

WARNING!

8

■ T

■


4

■ -



■ 2

■

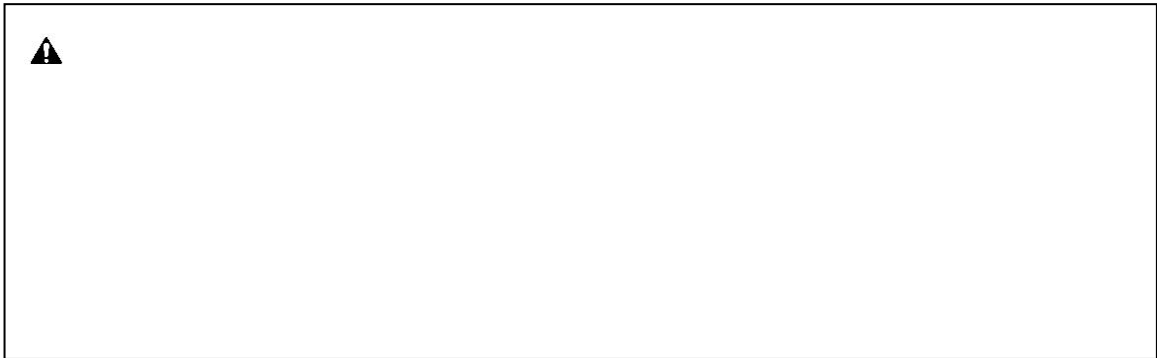

7

Roll Clamp User Manual			
W: I O		!	!
5	6 U	6 U	6 U
5	6 U	6 U	6 U
5	! 6 U	6 U	6 U
5	6 U	6 U	6 U
■			
■			
			5

MMIT0 IbI 6 WM

- 2
- 2
- 2
- /

9

/

5 W O1 W

1 9

0

2

: I M **W** I I a

IT I a O I I a

9



6

6

! 6 9 6

6 9

Model	Pressure value bar		Flow value L/min		
			Rotary motion		
	min	max	min	recommend	max
ZJ10R/11R/12R/13R/13H	140	160	19	26	38
ZJ22H/25H/27H/33H	140	160	19	38	57
ZJ38H/35R/42H/45R	140	160	38	57	76

-

/

/

2 8 !

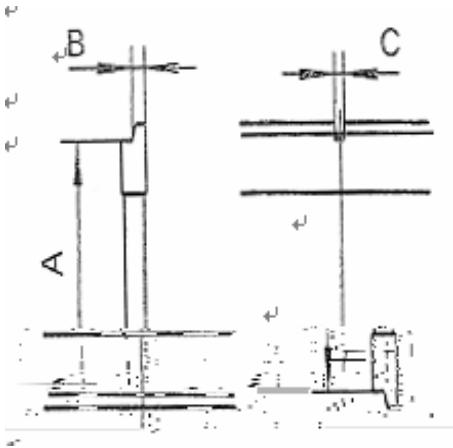



Figure 1

Install ation level	A		B		C	
	min	max	min	max	min	max
	380	381	15	16	15.2	16.8
	474.5	476	20.5	21.5	18.2	19.8
	595.5	597	24.5	25.5	18.2	19.8

1 I III W 5 M W

7

,

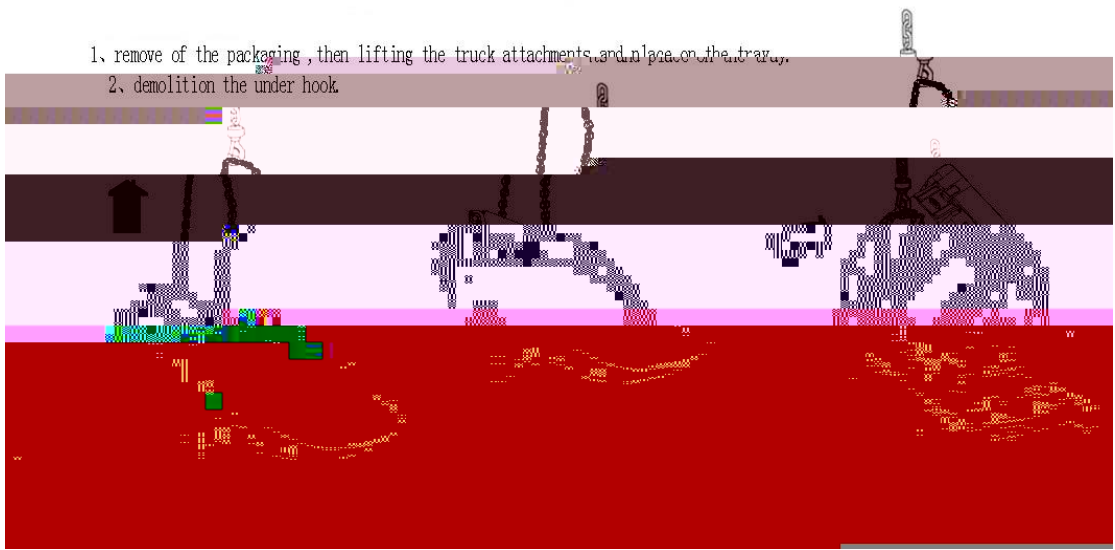

▲ 7

;

2

05

. ! "


9

;

5

5

6

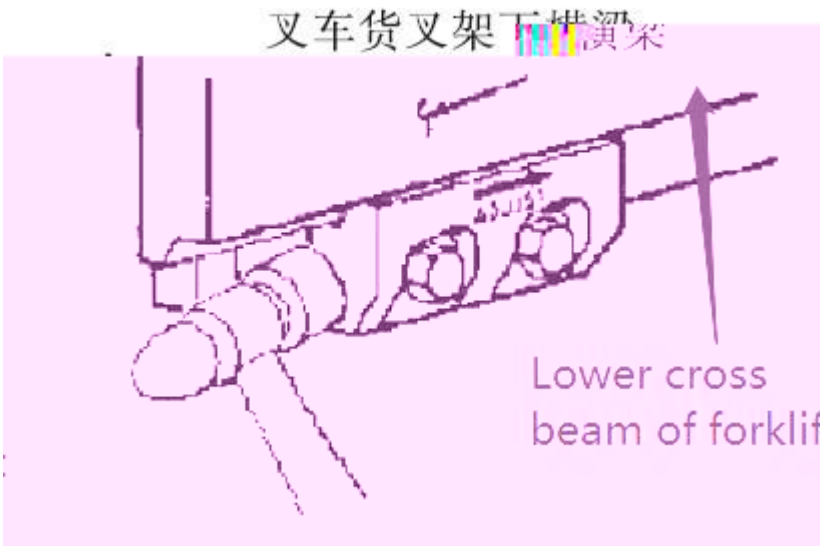


B

,


4

4

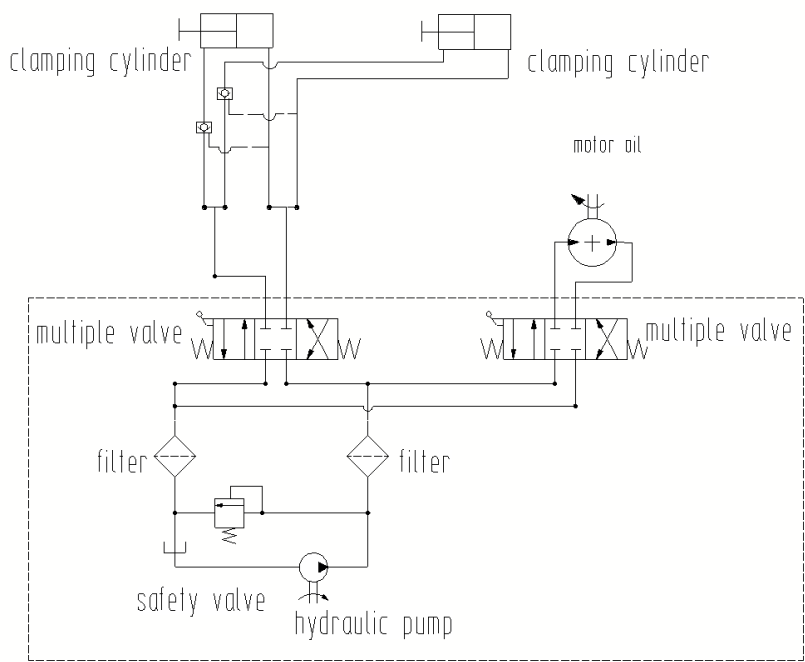

!

"

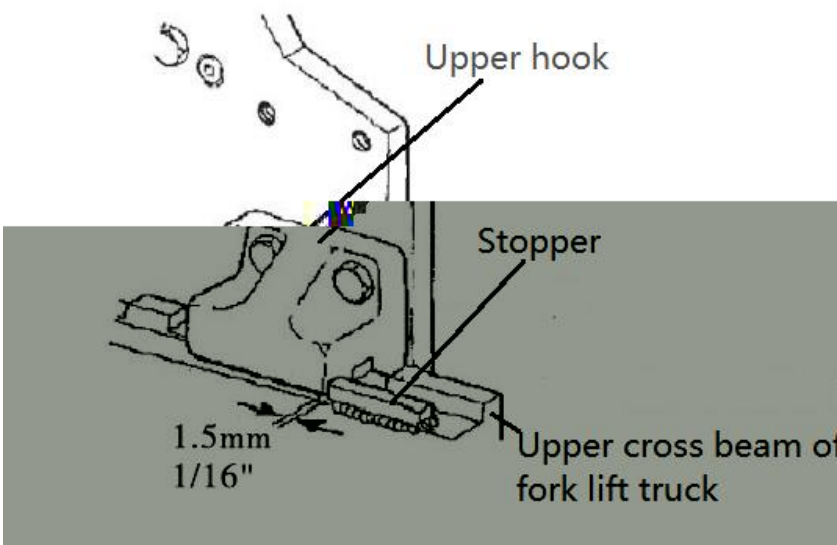

Upper hook Stopper Upper crossbeam of the forklift carriage

8

9


,

7 6

1

9

/

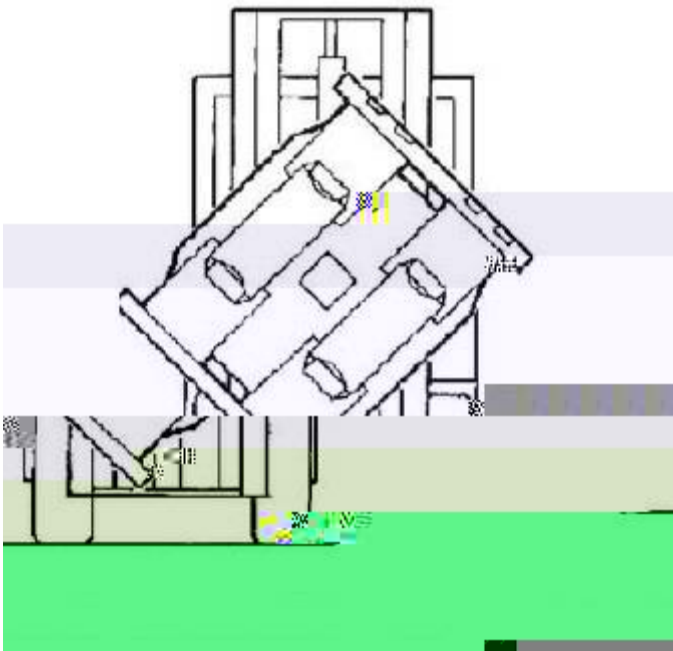

Turn to any point of 45° to adjust the short arm

,

,



-

/		
---	--	--

;	,	
		/
1	1	
	;	/

7 MI O1 W

6

9

5

8

/

.

9

.

;

6

6

! /

" /

/

4

5

8

,

5 I MI M WM I W

-

,

,

,

,

,

05 . ! "

,

,

2

,

2

6

/

6

/

W T M W W O

2

5

1

9

5

,

2

1

/

1

2

/

1

2

2

1

1

5

.

,

R W •

MIT I N U M

5 .

, 5

5 . , 5

.

7

5 . , 5

9

5 . , 5

5 . , 5

5

. , 5