




360 °

1		1
3		8
4		11
5		16
6		18
7		20

1

1.1

“ ” “ ” “ ” “ ” “ ” “ ”

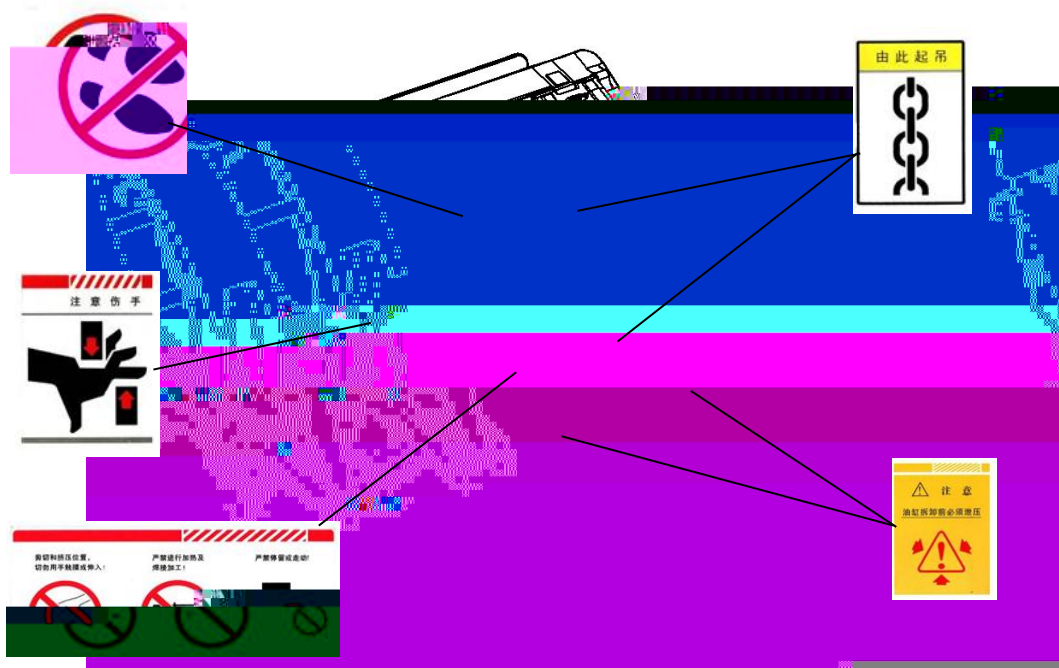

1.2

_____ -20 ~40 85 2000

1.3

1.3.1

1.3.1.1

➤

➤

➤

➤

➤

1.3.1.2

➤

➤

➤

➤

➤

➤

➤



1.3.2



1.3.3

80

80

1.3.4







	ISO4762	ISO4014	ISO4032
	8.8	10.9	12.9
M10	45Nm	66Nm	77Nm
M12	77Nm	115Nm	135Nm
M16	190Nm	280Nm	330Nm
M20	385Nm	550Nm	640Nm

1.4

2

2.1

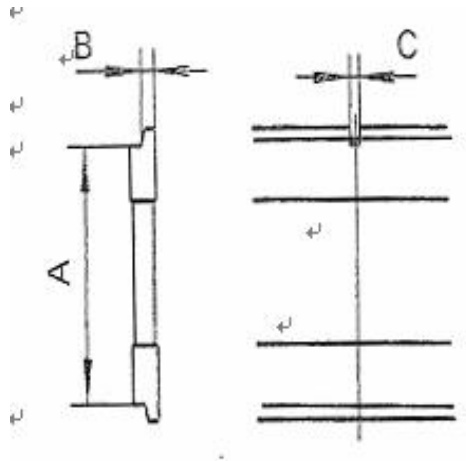

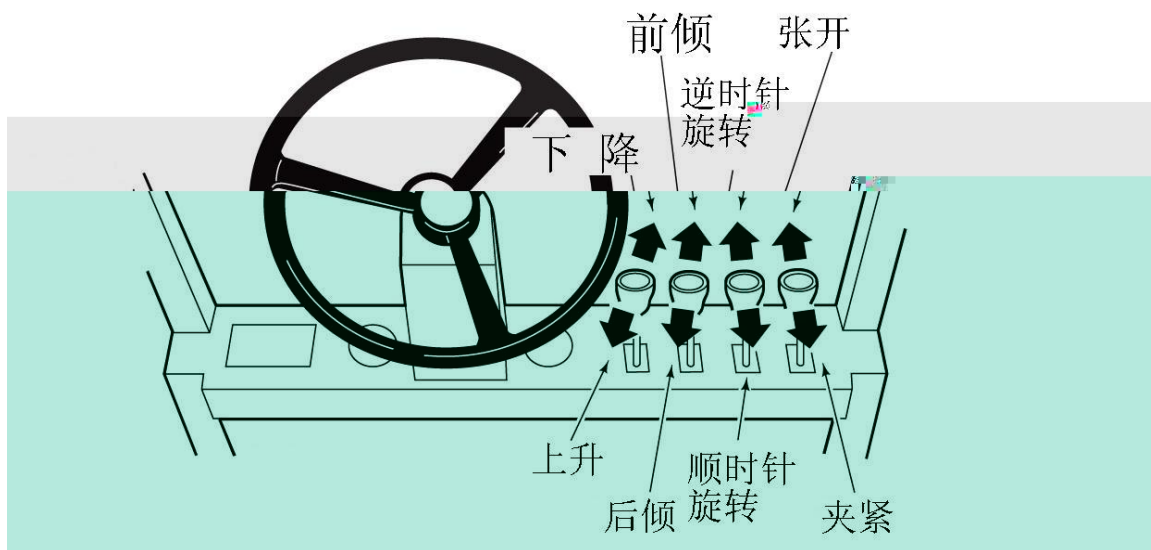

2.4


	Bar		L/min		
ZJ13H ZJ13/12/11/10R	140	160	19	26	38
ZJ22/25/27/33H	140	160	19	38	57
ZJ35/45R/ZJ38/46H	140	160	38	57	76



3


3.1

- 1、拆除包装，将属具吊起，垂直放置与托盘上。
- 2、拆除下钩。

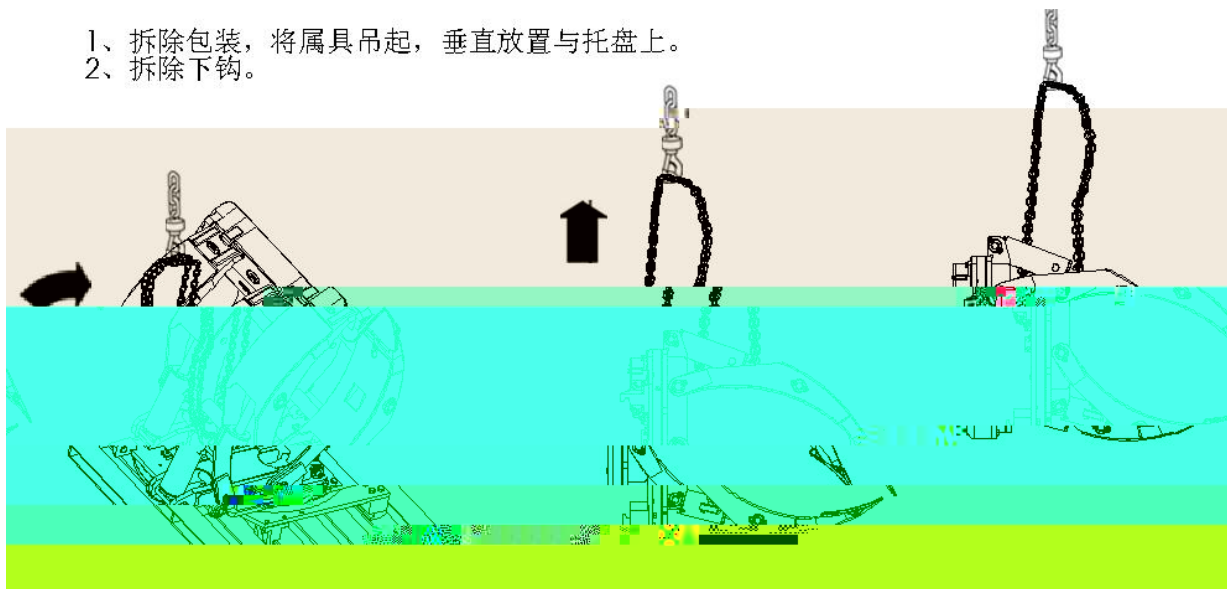

3.2

30

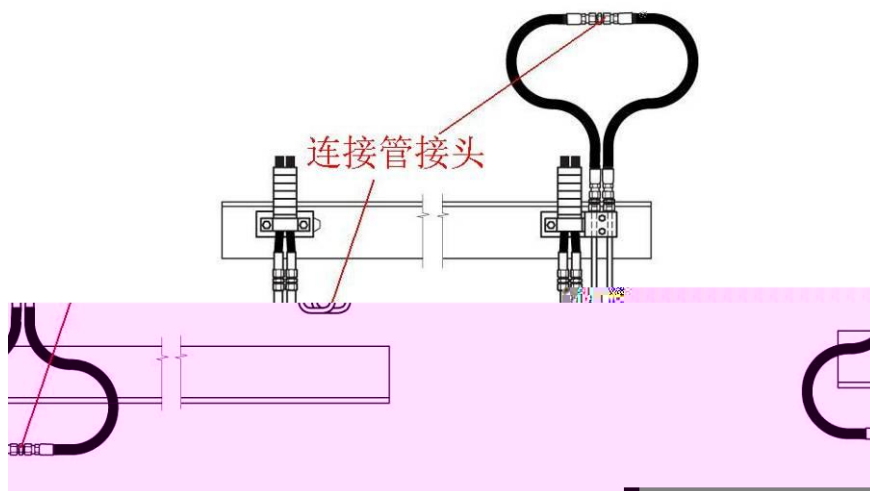

3.2


3.3

3.4

5cm

3.5



142 155N.m

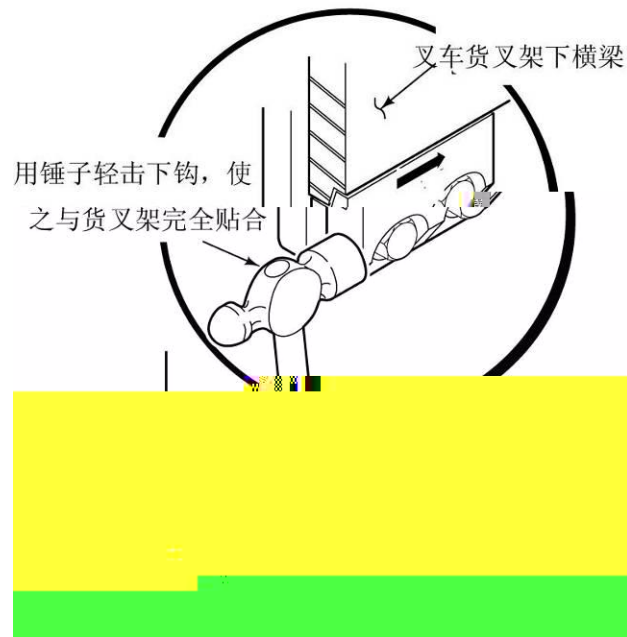

3.6


1.5mm

200

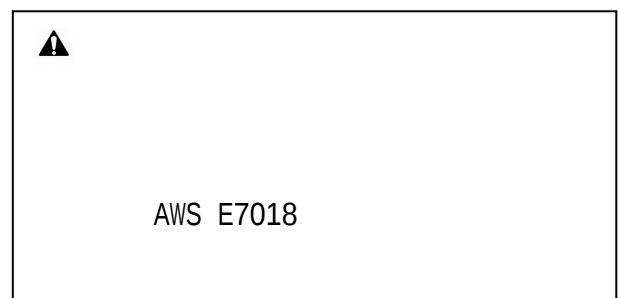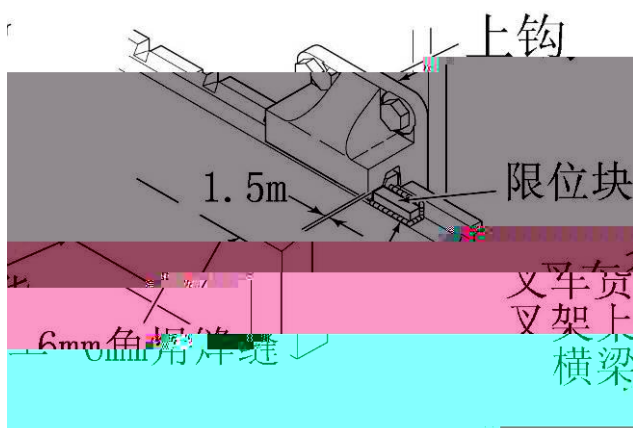

3.7

1




2

-
-
-

45 °

3

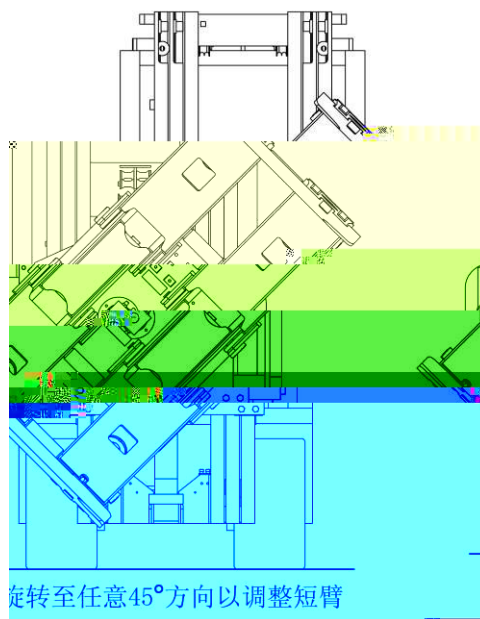

4

3

4

4.1

/

8cm


3~4 °

30cm

4.2

4.3

4.3.1


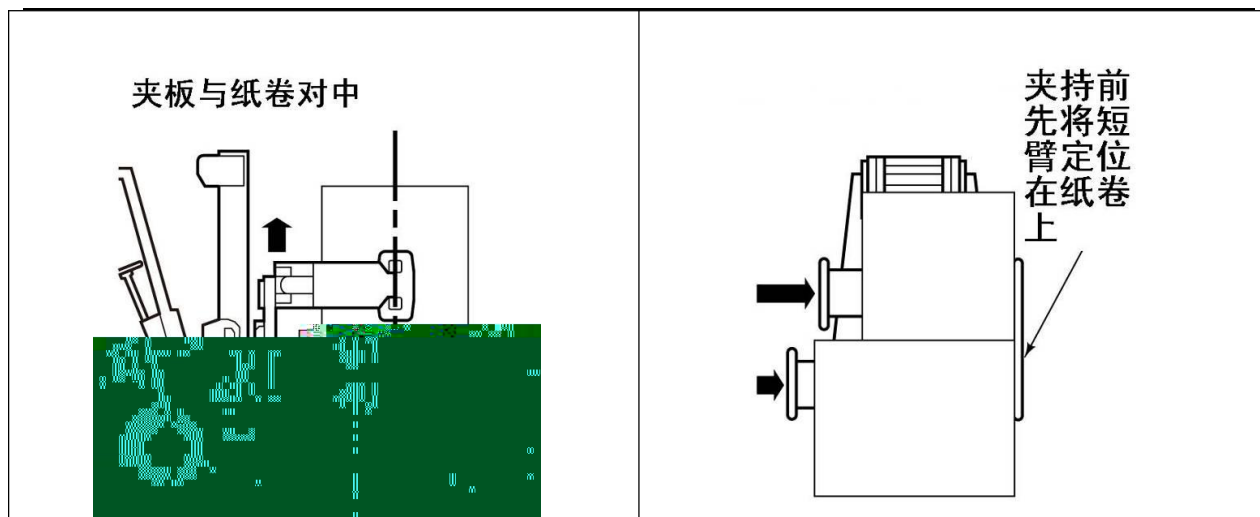


4.4

4.4.1

(1)

2

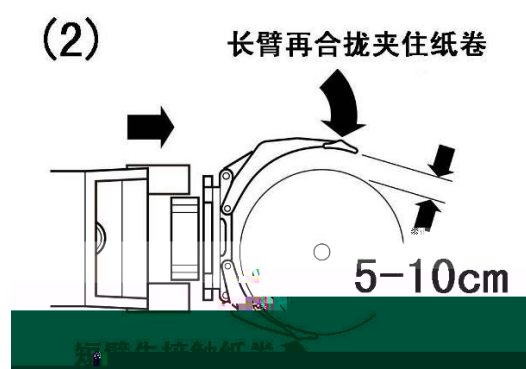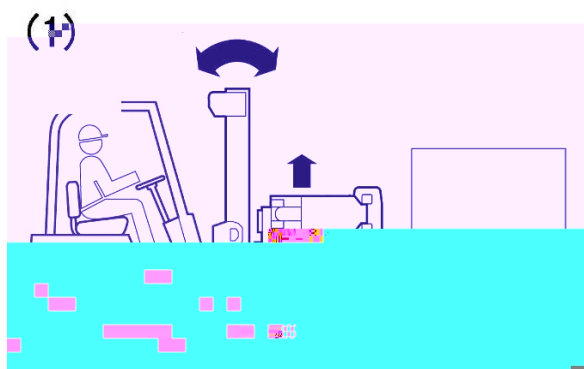


3

(3)



4

(4)

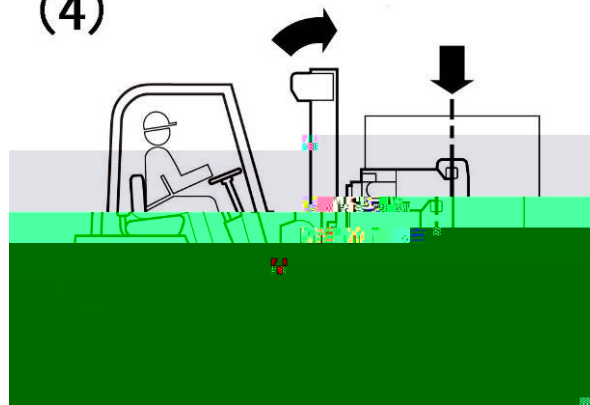

4.4.2


1

(1)




2

(2)

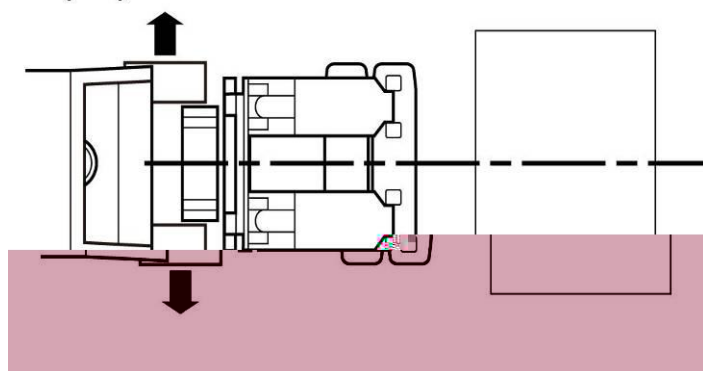


3

(3)

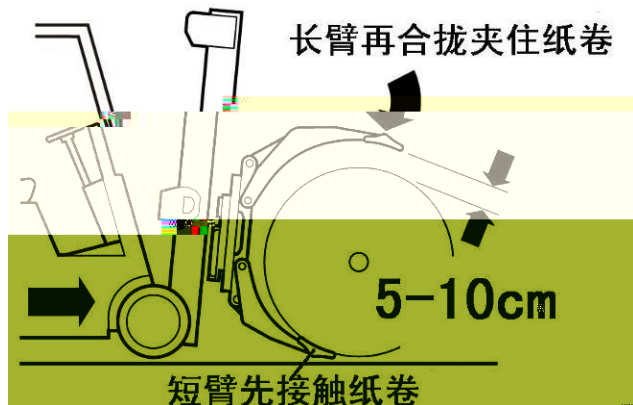


4

(4) 后倾 3-4°

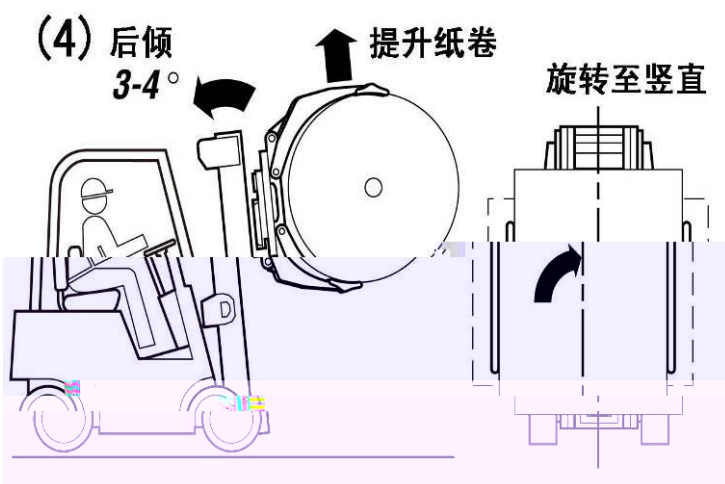

5

(5)

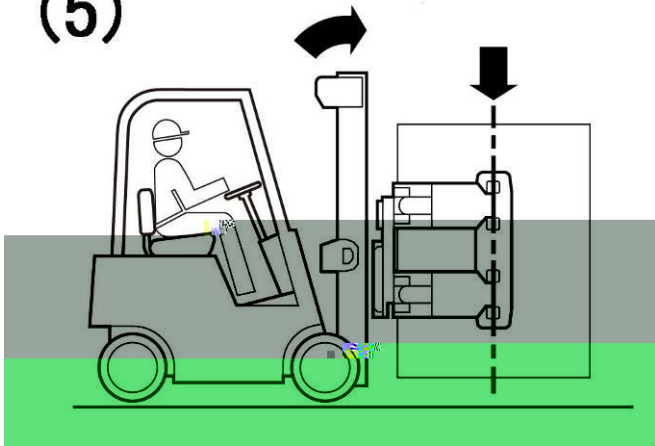

5

5.1 100

100

5.2 500

500

100

140N.m

220N.m

GL-5

SAE-85W/90

5.3 1000

1000

100 500

5.4 2000

2000

100 500 1000

5.5

6

6.1

2.4

6.2

6.3

170bar

6.4

6.5


6.6

6.7

6.8

0.1mm

0.3mm

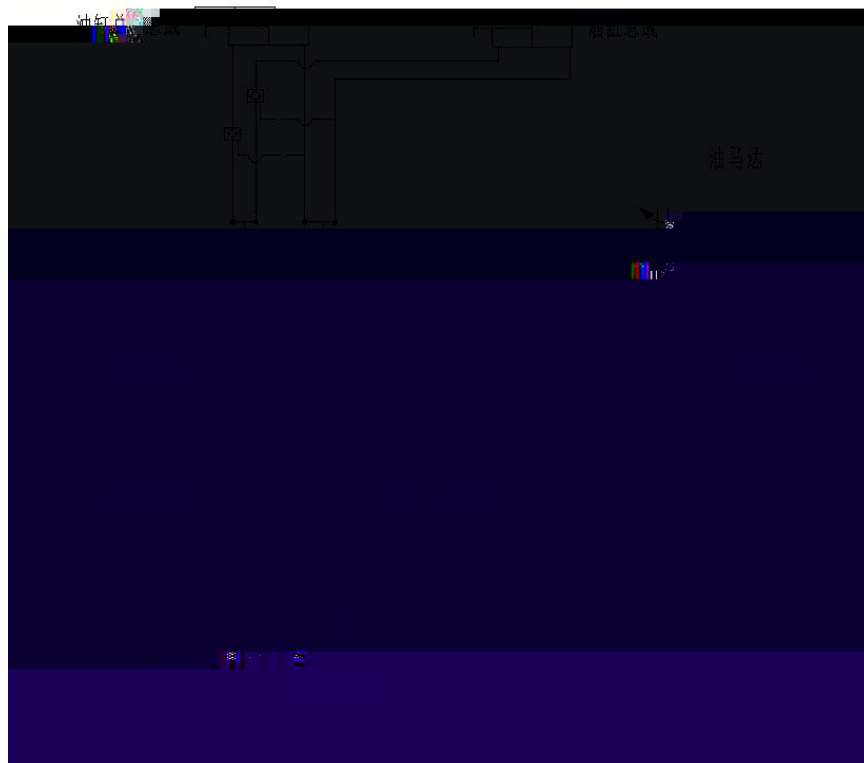

7

“

”

7.1

7.1.1

1

2 4000

12 2000

“ ”

7.2

7.2.1

7.2.2

7.2.3

7.3

7.3.1

7.3.2

7.3.3

7.3.4

7.4

/

0556-5345329/5228123

2025 8 28

.

